


# Single Unit Distribution

OFNR/OFNP

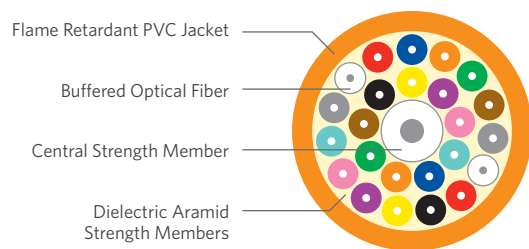

## SPECIFICATIONS

6-12 Fiber Configuration	Flexible 900 $\mu\text{m}$ tight buffered fibers, dielectric aramid yarns and overall jacket
18-24 Fiber Configuration	Band marked flexible 900 $\mu\text{m}$ tight buffered fibers, dielectric aramid yarns, overall jacket and central strength element
Jacket	OFNR: Flame retardant (FR) PVC OFNP: FR, low smoke PVC
Performance Compliance	UL 1651 CSA C22.2 No. 232 UL 1666 NFPA 262 Telcordia® GR-409, Issue 1 Telcordia GR-409, Issue 2 ANSI/ICEA S-83-596 ANSI/TIA-568.3-D
NRTL Programs	UL, c(UL) Listed OFNR UL, c(UL) Listed OFNP
Sustainability	UL Certified EPD HPD USGBC® Member RoHS-compliant/RoHS 2-compliant REACH-compliant

## ENVIRONMENTAL SPECIFICATIONS

	Riser	Plenum
Operation	-20°C to +75°C	0°C to +75°C
Storage/Shipping	-40°C to +75°C	-40°C to +75°C
Installation	-20°C to +65°C	0°C to +65°C

## SUSTAINABILITY LEADERSHIP



**RoHS REACH**

UL and the related logo are registered trademarks of UL LLC. Health Product Declaration, HPD and the related logo are trademarks of Health Product Declaration Collaborative. Telcordia is a registered trademark of Ericsson Inc. USGBC and the related logo are registered trademarks of U.S. Green Building Council.

## PRODUCT DESCRIPTION



**FIRST MANUFACTURER IN THE INDUSTRY**  
to offer products that contribute toward LEED!

These Superior Essex premises distribution optical fiber cables are constructed using a single unit, single jacket RoHS-compliant design with fiber counts from 6 through 24. The design consists of flexible 900  $\mu\text{m}$  tight buffered industry standard 250  $\mu\text{m}$  fibers (900/250/125  $\mu\text{m}$ ) and is suitable for use with standard connectors, like the SC, ST, and FC, and small-form-factor connectors like the LC. Dielectric aramid yarns are applied for strength while maintaining flexibility. The 18 and 24-fiber cable designs have a flexible glass reinforced central strength element for added durability and performance. A durable, flame resistant outer jacket is applied over the cable core using appropriate OFNR or OFNP rated materials.

## APPLICATIONS

- Intrabuilding backbones
- Conduit pathways
- Service entrance to communication closets
- "Behind-the-shelf" connections

## FEATURES

- UL® Certified Environmental Product Declaration (EPD)
- Health Product Declaration™ (HPD™)
- Marked in feet and meters
- BrakeBox® payout control system

## BENEFITS

- Contributes toward 1 LEED point under the Material and Resources credit (MRc)
- Contributes toward 1 LEED point under the MRC
- Meets commercial, government and international requirements for length markings
- Adjustable tension control on reel prevents over spin and entangling of cable

**PART NUMBERS AND PHYSICAL CHARACTERISTICS**

Listing	Part Number <sup>1</sup>	Fiber Count	Nominal Diameter in (mm)	Nominal Weight lbs/kft (kg/km)	Maximum Tensile Loading		Minimum Bend Radius		Package
					Install lbs (N)	Long Term lbs (N)	Install in (mm)	Long Term in (mm)	
<b>Single Mode</b>									
OFNR	43006x1zz	6	0.20 (5.0)	17 (25)	150 (660)	45 (200)	3.0 (75)	2.0 (50)	use key
OFNR	43008x1zz	8	0.24 (6.0)	20 (30)	150 (660)	45 (200)	3.5 (90)	2.4 (60)	use key
OFNR	43012x1zz	12	0.26 (6.5)	25 (37)	150 (660)	45 (200)	3.8 (98)	2.6 (65)	use key
OFNR	43018xK01*	18	0.30 (7.5)	35 (51)	300 (1,320)	90 (400)	4.4 (113)	3.0 (75)	Plywood reel
OFNR	43024xK01*	24	0.33 (8.5)	44 (66)	300 (1,320)	90 (400)	5.0 (128)	3.3 (85)	Plywood reel
OFNP	44006x1zz	6	0.20 (5.0)	17 (25)	100 (440)	30 (130)	3.0 (75)	2.0 (50)	use key
OFNP	44008x1zz	8	0.21 (5.4)	19 (28)	100 (440)	30 (130)	3.2 (81)	2.1 (54)	use key
OFNP	44012x1zz	12	0.24 (6.2)	24 (35)	100 (440)	30 (130)	3.7 (93)	2.4 (62)	use key
OFNP	44018xK01*	18	0.28 (7.0)	33 (49)	150 (660)	45 (200)	4.1 (105)	2.8 (70)	Plywood reel
OFNP	44024xK01	24	0.31 (7.8)	42 (62)	150 (660)	45 (200)	4.6 (117)	3.1 (78)	Plywood reel
<b>Multimode</b>									
OFNR	43006yGzz	6	0.20 (5.0)	17 (25)	150 (660)	45 (200)	3.0 (75)	2.0 (50)	use key
OFNR	43008yGzz	8	0.24 (6.0)	20 (30)	150 (660)	45 (200)	3.5 (90)	2.4 (60)	use key
OFNR	43012yGzz	12	0.26 (6.5)	25 (37)	150 (660)	45 (200)	3.8 (98)	2.6 (65)	use key
OFNR	43018yK01	18	0.30 (7.5)	35 (51)	300 (1,320)	90 (400)	4.4 (113)	3.0 (75)	Plywood reel
OFNR	43024yK01	24	0.33 (8.5)	44 (66)	300 (1,320)	90 (400)	5.0 (128)	3.3 (85)	Plywood reel
OFNP	44006yGzz	6	0.20 (5.0)	17 (25)	100 (440)	30 (130)	3.0 (75)	2.0 (50)	use key
OFNP	44008yGzz	8	0.21 (5.4)	19 (28)	100 (440)	30 (130)	3.2 (81)	2.1 (54)	use key
OFNP	44012yGzz	12	0.24 (6.2)	24 (35)	100 (440)	30 (130)	3.7 (93)	2.4 (62)	use key
OFNP	44018yK01	18	0.28 (7.0)	33 (49)	150 (660)	45 (200)	4.1 (105)	2.8 (70)	Plywood reel
OFNP	44024yK01	24	0.31 (7.8)	42 (62)	150 (660)	45 (200)	4.6 (117)	3.1 (78)	Plywood reel

\*Only available with TeraFlex® Bend Resistant single mode optical fiber types.

SINGLE MODE OPTICAL FIBER TYPES			
	TeraFlex® Bend Resistant		
	G.657.A1	G.657.A2	G.657.B3
<sup>1</sup> Replace "x" with:	K	J	L
Standard Jacket Colors*	Yellow		

MULTIMODE OPTICAL FIBER TYPES			
	TeraGain®	TeraFlex Bend Resistant Laser Optimized 50/125	
	62.5/125	10G/300	10G/550
<sup>1</sup> Replace "y" with:	6	N	P
Standard Jacket Colors*	Orange	Aqua	

\*Other jacket colors available upon request.  
See "Optical Fiber Specifications" in the "Technical Info" section for detailed fiber type specifications.

PACKAGING				
	Cut to Length Plywood Reel	1,000 ft BrakeBox®	1,500 ft BrakeBox	2,000 ft BrakeBox
<sup>1</sup> Replace "zz" with:	01	BB	BD	BC
Fiber Counts:	All	6 - 12	6 - 12	6